


# GS10 - Non-Structural Seismic Bracing




Our Seismic Bracing Systems are designed and engineered to brace suspended non-structural equipment and components to minimize damage from an earthquake or seismic event.

## FEATURES & BENEFITS

- Tested according to the following standards:
  - ANSI/ASHRAE Standard 171-2017 - Method Of Testing For Rating Seismic And Wind Restraints
  - AC156 - Seismic Certification by Shake-table Testing of Nonstructural Components
  - AS/NZS 1170.0 - Structural design actions - General principles
- Complete pre-engineered systems - full range of product & engineering services available to ensure the most efficient, cost effective bracing solutions
- No field swaging - consistent quality and no tools required to install
- Colour coded kits - easy field identification/inspection verification
- Adaptable kits - suitable for use in a variety of configurations

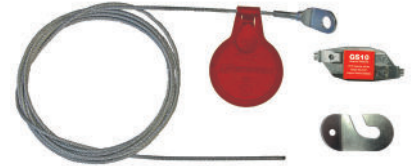

## PRODUCT CODE BUILDER

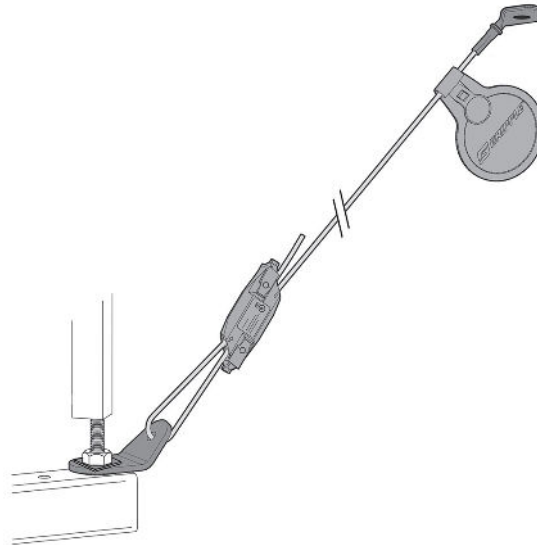

Wire Size:		Cable Length (m):		End Fitting:	Loose Bracket:	Anchor Size:
<b>GS10</b>	-	<b>3M</b>	-	<b>E</b>	<b>H</b>	<b>8</b>
<b>GS10</b>	-	<b>3M</b>	-	<b>E</b>	<b>T</b>	<b>8</b>
GS10 = 2mm		3m as standard. Custom lengths available.		E = 45° Eyelet. E4 (with a 10mm hole size is supplied as standard).	H = Retrofit bracket supplied as standard.	M8 Anchor supplied as standard.





# GS10 - Non-Structural Seismic Bracing



Our Seismic Bracing Systems are designed and engineered to brace suspended non-structural equipment and components to minimize damage from an earthquake or seismic event.

## PRODUCT INFORMATION

Wire Size: 2mm pre-stretched wire rope

ULS Rating as per AS/NZS1170.0: 200 kg\*

\* *Bracket and anchor selection will determine actual load rating. Brace methodology must be specified by a Professional Engineer.*

Supplied: As ready to install kits including a Gripple Lockable Fastener, a length of pre-stretched wire rope (3 m, 6 m, or 9 m), end fitting and loose bracket as specified and a colour coded identification tag


Standards & Compliance: AS1170.4, NZS1170.5, NZS4219, SMACNA, OSHPD, UL NEBS

## INSTALLATION GUIDELINES

1. Attach loose bracket



2. Install anchor and attach swaged bracket



3. Insert wire rope into Gripple Lockable Fastener




4. Feed wire rope through loose bracket



5. Feed wire rope through the second channel in Gripple Lockable Fastener



6. Lock Gripple fastener



1. Attach loose brackets to non-structural component
2. Secure end fixing to structure
3. Insert wire rope through one channel of the Gripple Lockable Fastener
4. Thread the wire rope through the hole of the seismic bracket
5. Thread wire rope back through the Gripple Lockable Fastener and hand tighten to remove all slack
6. Hand-tighten the locking bolts until secure

Images shown are examples of a typical installation. Specifics can vary between installations.

## SYSTEM COMPONENTS



Gripple Lockable Fastener



Identification tag on wire rope



Choice of brackets

## Anchor Options



C1 or C2 Anchor Bolts for concrete



Steel Bolt



Concrete Screw



Coach Screw



PM T52 Beam Clamp

